



Product Features

Very High 500g Accelerometer

High Amplitude

1 - 15000 Hz (60-900,000 CPM) Frequency

Response when Stud Mounted


10 mV/g $\pm 10\%$ Sensitivity

± 500 g Dynamic Range

AC131-1A

2 Pin Connector

Connector Pin	Polarity
A	(+) Signal/Power
B	(-) Common




Stock Product

AC131-2C

CB1U3 Integral Cable

Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire




Built To Order

AC131-3C

CB2U6 Armored Integral Cable

Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire




Built To Order

AC131-6C

CB611 Heavy Duty Armored Integral Cable


Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire



Built To Order

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	AC131	M/AC131	Environmental		
Sensitivity ($\pm 10\%$)		10 mV/g	Temperature Range	-58 to 250°F	-50 to 121°C
Frequency Response (± 3 dB)	60-900,000 CPM	1,0-15000 Hz	Maximum Shock Protection	5,000 g, peak	
Frequency Response ($\pm 10\%$)	120-360,000 CPM	2,0-6000 Hz	Electromagnetic Sensitivity	CE	
Dynamic Range		± 500 g, peak	Sealing	Welded, Hermetic	
Electrical			Submersible Depth	200 ft.	60 m
Settling Time	<2 Seconds		Physical		
Voltage Source (IEPE)	18-30 VDC		Sensing Element	PZT Ceramic	
Constant Current Excitation	2-10 mA		Sensing Structure	Shear Mode	
Spectral Noise @ 10 Hz	300 μ g/ $\sqrt$ Hz		Weight	3.2 oz.	90 grams
Spectral Noise @ 100 Hz	30 μ g/ $\sqrt$ Hz		Case Material	316L Stainless Steel	
Spectral Noise @ 1000 Hz	6 μ g/ $\sqrt$ Hz		Mounting	1/4-28	
Output Impedance	<100 ohm		Connector (Non-Integral)	2 Pin MIL-C-5015	
Bias Output Voltage	10-14 VDC		Resonant Frequency	1,380,000 CPM	23000 Hz
Case Isolation	>10 ⁸ ohm		Mounting Torque	2 to 5 ft. lbs.	2,7 to 6,8 Nm
			Mounting Hardware	1/4-28 Stud	M6x1 Adapter Stud
			Calibration Certificate	CA10	

Typical Frequency Response

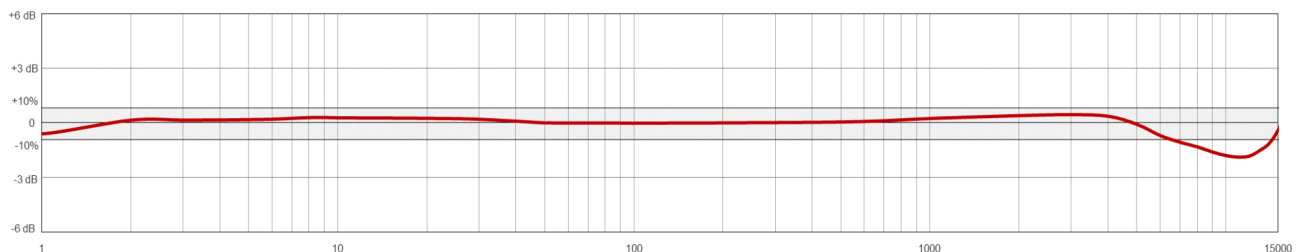

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900