



Product Features

Very High 500g Side Exit Accelerometer for High Amplitude Applications

Helps to Detect Gearbox Defects and Other High Frequency Faults

1,0 - 15000 Hz (60-900,000 CPM) Frequency Response


10 mV/g $\pm 5\%$ Sensitivity

32 kHz Resonant Frequency

AC224-1D

2 Pin Mini Mil Connector

Connector Pin	Polarity
A	(+) Signal/Power
B	(-) Common




Stock Product

AC224-2D

CB11U Integral Cable

Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire




Built To Order

AC224-3D

CB2U6 Armored Integral Cable


Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire



Built To Order

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	AC224	M/AC224	<u>Environmental</u>		
Sensitivity ($\pm 5\%$)		10 mV/g	Temperature Range	-58 to 250°F	-50 to 121°C
Frequency Response ($\pm 3\text{dB}$)	60-900,000 CPM	1,0-15000 Hz	Maximum Shock Protection	5,000 g, peak	
Frequency Response ($\pm 10\%$)	90-420,000 CPM	1,5-7000 Hz	Electromagnetic Sensitivity	CE	
Frequency Response ($\pm 5\%$)	180-180,000 CPM	3,0-3000 Hz	Sealing	Welded, Hermetic	
Dynamic Range		± 500 g, peak	Submersible Depth	200 ft.	60 m
<u>Electrical</u>			<u>Physical</u>		
Settling Time	<2 seconds		Sensing Element	PZT Ceramic	
Voltage Source (IEPE)	18-30 VDC		Sensing Structure	Shear Mode	
Constant Current Excitation	2-10 mA		Weight	2.1 oz	60 grams
Spectral Noise @ 10 Hz	100 $\mu\text{g}/\sqrt{\text{Hz}}$		Case Material	316L Stainless Steel	
Spectral Noise @ 100 Hz	19 $\mu\text{g}/\sqrt{\text{Hz}}$		Mounting	1/4-28	
Spectral Noise @ 1000 Hz	5 $\mu\text{g}/\sqrt{\text{Hz}}$		Connector (Non-Integral)	2 Pin mini-MIL	
Output Impedance	<100 ohm		Resonant Frequency	1,920,000 CPM	32000 Hz
Bias Output Voltage	10-14 VDC		Mounting Torque	2 to 5 ft. lbs.	2,7 to 6,8 Nm
Case Isolation	>10 ⁹ ohm		Mounting Hardware	1/4-28 Captive Bolt	M6x1 Captive Bolt
			Calibration Certificate	CA10	

Typical Frequency Response

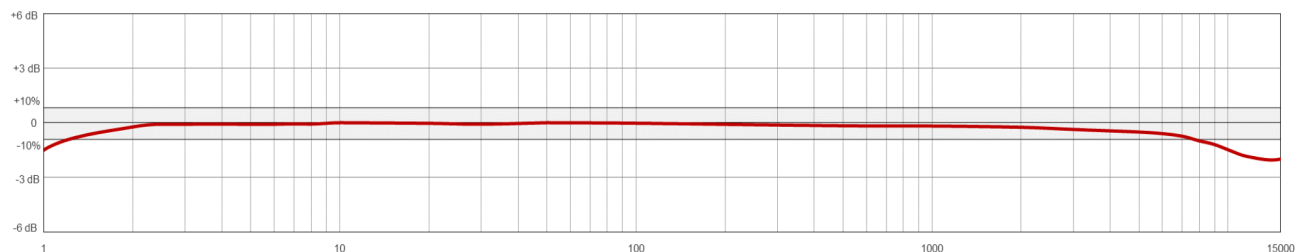

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900