



Product Features

Superior RF Immunity in a Compact 100 mV/g Sensor

Improved Linearity

± 80 g, Dynamic Range


0.3 - 15,000 Hz (18-900,000 CPM) Frequency Response

Standard 2 Pin MIL Connector on Non-Integral Option

AC292-1D

2 Pin Connector

Connector Pin	Polarity
A	(+) Signal/Power
B	(-) Common




Stock Product

AC292-2D

CB1U3 Integral Cable

Conductor	Polarity
A	(+) Signal/Power
B	(-) Common
Shield	Cable Drain Wire




Built To Order

AC292-3D

CB2U6 Armored Integral Cable

Conductor	Polarity
A	(+) Signal/Power
B	(-) Common
Shield	Cable Drain Wire




Built To Order

AC292-6D

CB611 Heavy Duty Armored Integral Cable


Conductor	Polarity
A	(+) Signal/Power
B	(-) Common
Shield	Cable Drain Wire



Built To Order

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	AC292	M/AC292	<u>Environmental</u>		
Sensitivity (±5%)		100 mV/g	Temperature Range	-58 to 250°F	-50 to 121°C
Frequency Response (±3dB)	18-900,000 CPM	0.3-15000 Hz	Maximum Shock Protection	5,000 g, peak	
Frequency Response (±10%)	60-600,000 CPM	1.0-10000 Hz	Electromagnetic Sensitivity	CE	
Frequency Response (±5%)	600-300,000 CPM	10-5000 Hz	Sealing	Welded, Hermetic	
Dynamic Range		± 80 g, peak	Submersible Depth	200 ft.	60 m
<u>Electrical</u>			<u>Physical</u>		
Settling Time	<2 Seconds		Sensing Element	PZT Ceramic	
Voltage Source (IEPE)	18-30 VDC		Sensing Structure	Shear Mode	
Constant Current Excitation	2-10 mA		Weight	1.8 oz	51 grams
Spectral Noise @ 10 Hz	8 µg/√Hz		Case Material	316L Stainless Steel	
Spectral Noise @ 100 Hz	4 µg/√Hz		Mounting	1/4-28	
Spectral Noise @ 1000 Hz	2 µg/√Hz		Connector (Non-Integral)	2 Pin MIL-C-5015	
Output Impedance	<100 ohm		Resonant Frequency	1,560,000 CPM	26000 Hz
Bias Output Voltage	10-14 VDC		Mounting Torque	2 to 5 ft. lbs.	2.7 to 6.8 Nm
Case Isolation	>10 ⁸ ohm		Mounting Hardware	1/4-28 Stud	M6x1 Adapter Stud
			Calibration Certificate		CA10

Typical Frequency Response

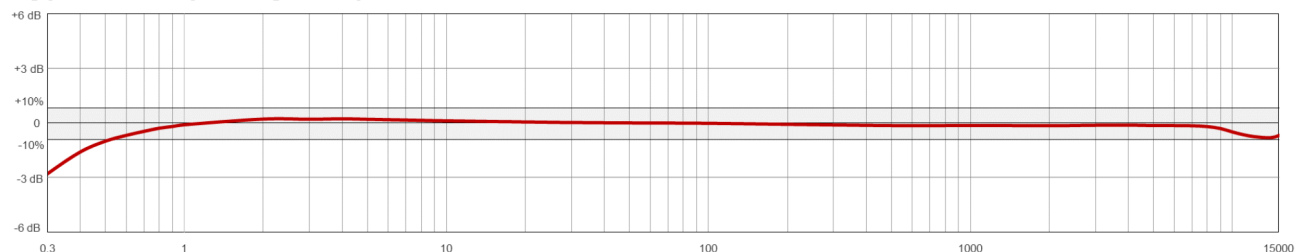

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900